

Тuya Датчик протечки Zigbee

+ В СРАВНЕНИЕ

Материал из Базы знаний Девелика





Zigbee Sensor

User Manual



Please read this manual carefully before use and keep it for future reference.

3.Prerequisite
Operational and compatible Zigbee Smart Gateway Setup.
Zigbee Smart Gateway
Open Smart Life app and tap the Zigbee Gateway. Tap Add sub-device and select Flood Detector or other sensors. Follow on-screen instructions to continue.



SPECIFICATIONS

Input voltage:
AAA1.5V x2
Static current:
≤5uA
Alarm current:
≤150mA
Low-Voltage indication:
≤2.4V
WIFI:
802.11 b/g/n
Installation:
Wall-mounted
Working Temperature:
-10°C ~ +50°C
Working Humidity:
95%RH




HOW TO USE

- 1.Push the mounting bracket upward and take out the bracket, then insert the battery.
- 2.Put the battery into the battery bin and place it according to the graphics in the battery bin. After two batteries are loaded, the indicator lights are always on and then off.






RESET




iOS / Android

Download the Smart Life APP in AP store or Play Store or scan the above QR code on Google

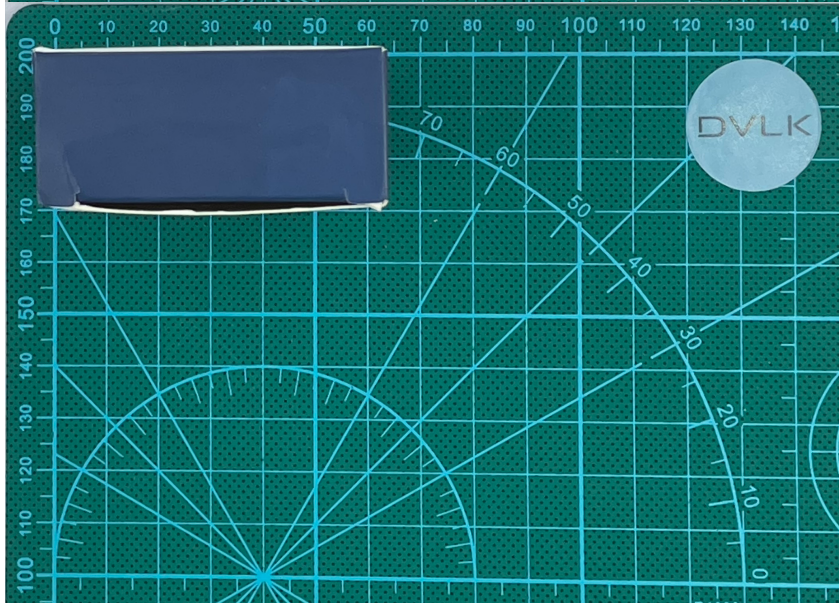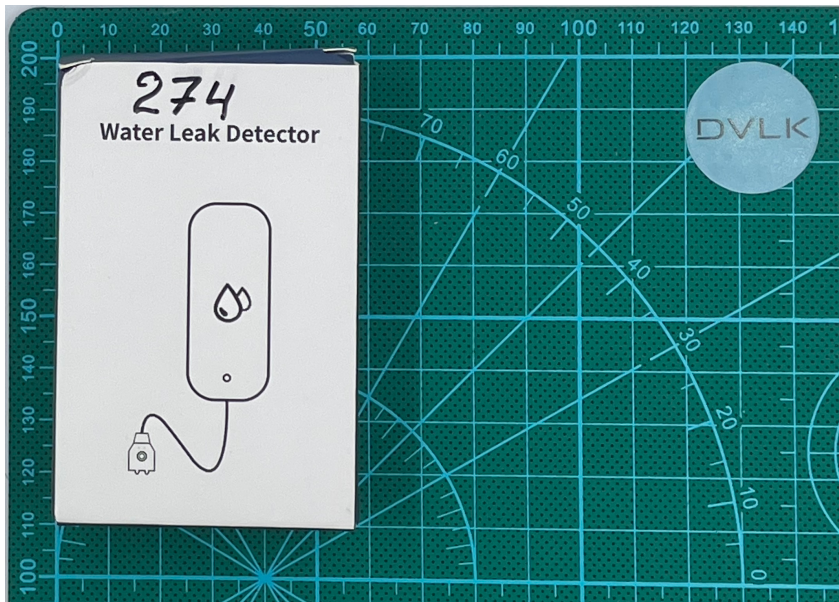

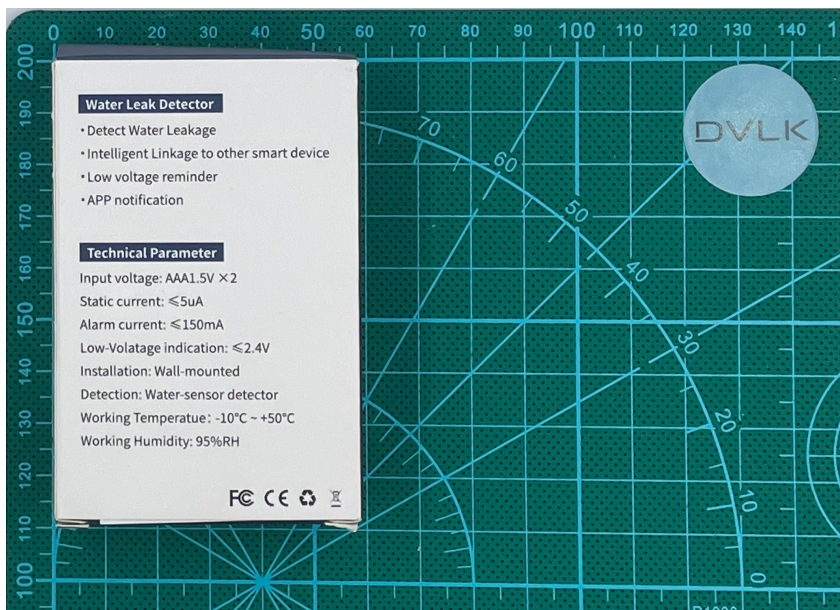

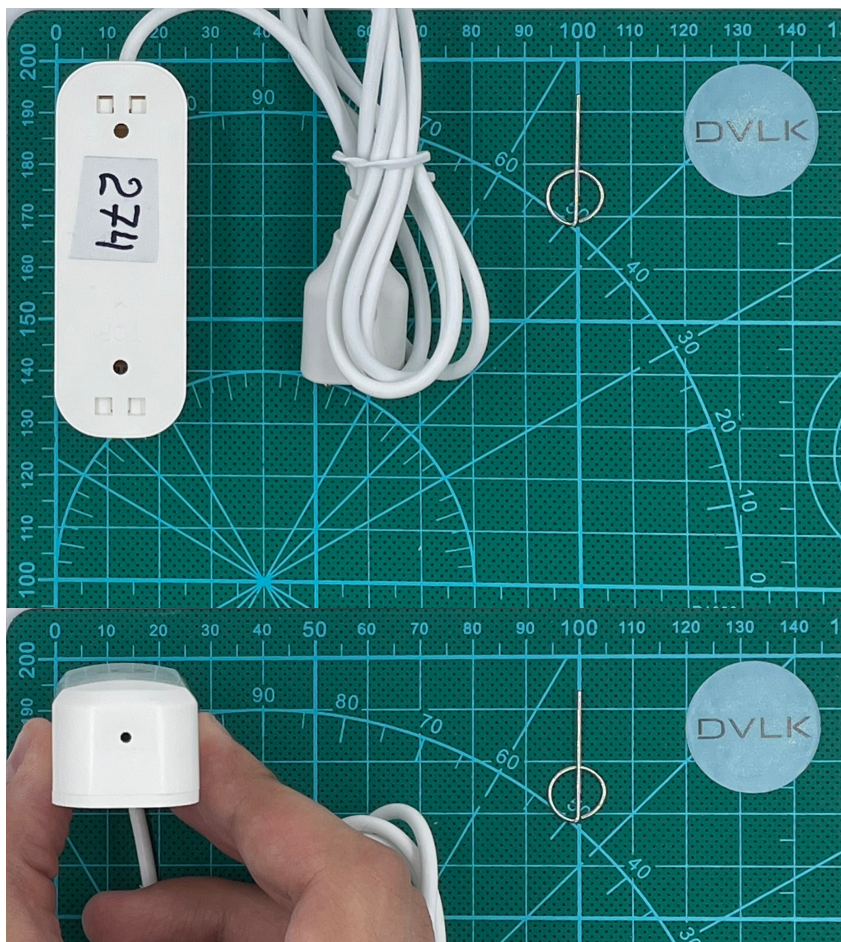

Тип устройства	Датчик протечки
Назначение и функциональные требования	—
Производитель устройства	Тцуа
Серия устройства	—
Модель и линейка устройства	—
Артикул устройства и ссылка на сайт производителя	—
Ссылка на документацию	Размеры 69*23*19 мм
Рабочая температура	-30 °C ~ 70 °C
Роль в Zigbee сети	—
Источник питания	DC 3V (CR2032) Мобильное приложение Smart Life Интерфейс подключения Zigbee
Время работы	8 месяцев
Интеграция со Sprut	Zigbee Примечания

Экосистема	Tuya
Каталог sprut	—
Шаблон для sprut	—
Где купить	aliexpress (https://aliexpress.ru/item/1005006199707659.html?spm=a2g2w.orderdetail.0.0.61404aa6YCcOZb&sku_id=12000036237968851)
Стоимость	\$7,6
Номер на складе	DVLK0274
Номер коробки	10

Источник — develika-wiki.marusteam/wiki/Tuya Датчик протечки Zigbee

 Войдите, чтобы оставить комментарий